

STEP 1



Once water level in pool has reached a minimum of 24 inches, the skimmer U gasket can be installed for skimmer installation.

STEP 2



Start by using a flat piece of cardboard on opposite side to cut against. Trim by leaving a 1/4" strip between the knife blade and cutout edge. This allows the liner to stretch into position.

STEP 3



Trim right side, left side and top side ONLY.




Fold liner flap down.



Pull down on flap and tape along the bottom edge.




Install top half of U-gasket. Trim out a rectangle shape in liner as shown.

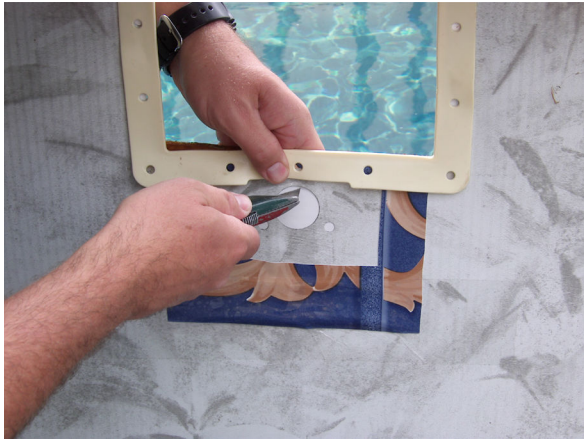

Trim out vacuum port hole.

Install bottom half of U-gasket. Make sure the two halves are straight and aligned with skimmer mounting holes. The two halves must be aligned and touching where the two pieces meet. Refer to pic(arrows).

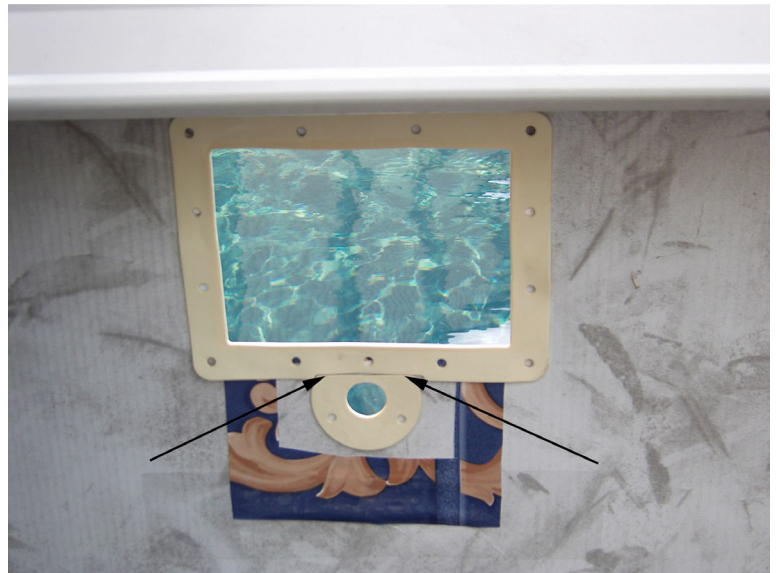

Install skimmer per skimmer installation directions.